


## CAT-2 Heavy-Duty Label Rewinders


# HEAVY DUTY LABEL REWINDERS



CAT-2-STANDARD

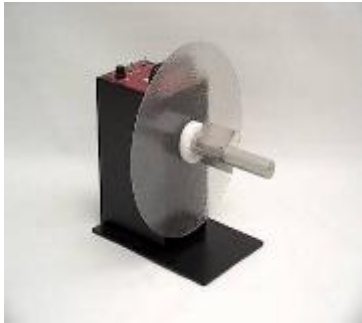

CAT-2-ACH with  
APG-CAT

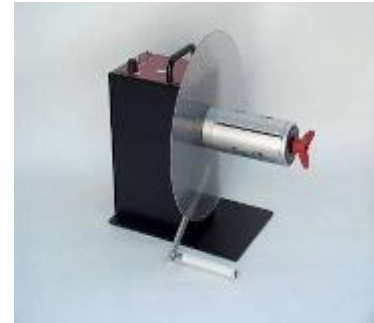

CAT-2-TA-CHUCK

LABELMATE's Constant Adjustable Torque™ ("CAT") technology has made the silent, easy-to-use CAT-2 the "Industry Standard" Label Rewinder. There are no awkward troublesome belts or clutches.

The CAT-2-STANDARD handles labels up to 155 mm ( 6-inches ) wide and will wind a roll of labels up to a 300 mm ( 12" ) diameter. Torque and Direction are fully controllable from the Control Panel. Dual torque ranges provide plenty of power for use with a LABELMATE Slitter, too.

For wider labels up to 255 mm ( 10" ), choose the CAT-2-10.

Model CAT-2-ACH includes an Adjustable Core Holder that accepts any core size from 25 mm to 101 mm ( 1-inch to 4-inches ) in diameter and up to 155 mm ( 6-inches ) in width.

The optional Adjustable Paper Guide APG-CAT with movable arm can be installed in minutes on the base plate of the CAT-2-ACH or CHUCK. This inexpensive accessory guides the outer edge of the label roll as it's being rewound to ensure even roll alignment.

The CAT-2-CHUCK includes LABELMATE's durable "Quick-Chuck"™ quick-locking Core Chuck, permitting the fastest loading and unloading of cores and label rolls. The CAT-2-CHUCK is ideal for label slitting applications, high-volume production environments, or anywhere the ultimate convenience in Rewinders is desired. The CAT-2-CHUCK is available for 38-,40-,44-,70, 76- and 100 mm cores.

NEW! The CAT-40G is gear motor driven for more torque. It accepts bigger rolls with a diameter up to 400 mm. It is equipped with the LABELMATE "Quick-Chuck"™ quick-locking Core Chuck.

Please note that if to be placed after The CAT-2-TA Heavy-Duty Label Rewinders

The CAT-2-TA is a CAT-2 with tension arm specially engineered for applications that require fixed web tension. The TA is available for all models of CAT-2. All CAT-2-TA's are supplied with a Heavy-Duty Power Supply.

IMPORTANT NOTE: The CAT-2-TA can be also be used as a regular CAT-2 with the same features. Rugged, heavy-gauge steel construction allows your CAT-2 / CAT-2-TA Rewinder to be simply set in place. Special anti-slip feet keep the unit from moving. The CAT-2 handles any rewind job and with its "HIGH" torque range can also power the LABELMATE S-100 or S-200 Label Slitters.

Reliable, high quality and maintenance-free, the Heavy-Duty CAT-2 / CAT-2-TA Label Rewinders feature a 5-Year Parts and Labour Limited Warranty, the longest in the industry. Put LABELMATE CAT-2 / CAT-2-TA Label Rewinders to work for you today and enjoy a new dimension in label re-winding convenience and reliability. Custom colours, badging, and special core holders are available for private label applications.

r a print, you need the CAT-40G-TA.

#### FULL SIZE "CAT-2" & "CAT-2-TA" HEAVY-DUTY LABEL REWINDERS

Model	ADD SUFFIX	DESCRIPTION	LABEL WIDTH (mm)	ROLL DIAM (mm)	SPEED (mm/sec)
CAT 2	STANDARD	The 'Industry Standard' Heavy-duty Label Rewinder. 76mm standard.	155	300	1250
	ACH	CAT-2 with an Adjustable Core Holder for any core size from 25 to 101mm in diameter. With inner flange. Use APG-CAT if you wish to also guide the outer edge of your label.	155	280	1250
	CHUCK	The industry standard Heavy-duty Label Rewinder with an easy-loading 'Quick-Chuck'. Ideal for production work. 76mm standard. Other 'Quick-Chuck' sizes available.	170	300	1250
	10 INCHES	CAT-2 for labels up to 255mm wide. 76mm standard; 38, 40, 44 or 70mm on request.	255	300	1250
	1 INCH	CAT-2 for 25.4mm diameter cores.	155	220	1250
New! CAT-40G		Gear motor driven. Tight rewind up to 400mm. 76mm 'Quick-Chuck' standard. Other 'Quick-Chuck' sizes available.	170	400	320
CAT 2 TA	STANDARD	Same features as CAT-2-STANDARD but with Tension Arm	155	300	1250
	ACH	Same features as CAT-2-ACH but with Tension Arm	155	280	1250
	CHUCK	Same features as CAT-2-CHUCK but with Tension Arm.	255	300	1250
	10 INCHES	Same features as CAT-2-10-INCHES but with Tension Arm.	255	300	1250
	1 INCH	Same features as CAT-2-1-INCH but with Tension Arm.	155	220	1250
New! CAT-40G-TA		Same features as CAT-40G but with Tension Arm.		400	320

IMPORTANT! MAXIMUM LABEL ROLL WEIGHT:

STANDARD: 7Kg.

ACH: 6Kg.

CHUCK: 15Kg.

CAT-40G: 12Kg.

## The CAT-2 Heavy-Duty Label Rewinders



CAT-2-10-Inches




CAT-2-TA-ACH



CAT-40G-TA

## LABEL REWINDERS CAT-2 / CAT-2-TA OPTIONS

Model	DESCRIPTION	LABEL WIDTH (mm)	ROLL DIAM (mm)
APG CAT	Optional Adjustable Paper Guide For CAT-2(-TA)-ACH or CAT-2(-TA)-CHUCK. Guides the outer edge of the label web to ensure an even roll edge.	-	-
VANES	Set of 3 vanes (fins). 38, 40, 44, 70 & 76mm available	155	280
ACH-CAR	Adjustable Core Holder for any core size from 25 to 100mm in diameter. With inner flange.	-	-
LTO	Low Torque Option. For tension sensitive printers. Factory installed. (Inkjet).	-	-
FOOT SWITCH	Foot Switch to start and stop the TWIN-CAT-2, CAT-2 or MC Rewinders (€80 for the MC).	-	-
HD-PS	230V – 50Hz DC Heavy-Duty Power Supply. Output: 15V – 4.6A Included with CAT-2-TA Rewinder.	-	-
PS-CAT 2	230V - 50Hz AC Power Supply for CAT-2 and UCAT-2. Output: 11V – 2.5A Included with CAT-2 Rewinder.	-	-



CAT-210-Chuck



CAT-40G



CAT-2-TA-Standard

  
**AIS**  
 AUTO I.D. SYSTEMS LTD  
 30 Paradise Lane, Formby, Merseyside, L37 7EJ

Email: [Info@Auto-ID-Systems.co.uk](mailto:Info@Auto-ID-Systems.co.uk)

[www.Auto-ID-Systems.co.uk](http://www.Auto-ID-Systems.co.uk)

CALL : 01704 876241  
 FAX : 01704 832321

