

LD-100-U & LD-200-U

Universal Powered Label Dispensers

For All Labels Including Transparent and Black Labels



LD-100-U

The LD-U Type Automatic Label Dispensers uses a new “state of the art” reflective detector that allows the machine to dispense all types of labels, including transparent and black labels.

The new LD-U range is using a compact photoelectric sensor with optic-fibre cable. The LD-100-U and LD-200-U offer the same advantages, convenience and durability as the popular LD-RS models with the extra benefit of dispensing any kind of labels.

The LD-100-U-SS and LD-200-U-SS feature a stainless steel chassis and cover and can be used in humid environment. They are ideal for food industry and pharmaceutical applications.

All LABELMATE Label Dispensers are easy to set up, too. You just slide your roll of labels onto the built-in Core Holder. Then thread the label web through to the take-up spindle and your Label Dispenser is ready for use! Rugged, heavy-gauge steel construction and precision parts yield products of the highest quality. Designed for all-day, every-day use, these Dispensers are backed by LABELMATE’s famous **3-Year Parts and Labour Limited Warranty**, assuring you trouble-free performance.

MODEL	DESCRIPTION	LABEL WIDTH (mm)	LABEL LENGTH (mm)	ROLL DIAM. (mm)	SPEED (mm/sec)
LD-100-U	Automatically advances the next label ready to pick. Fast label loading. Quick and convenient operation! For transparent and black labels.	Up to 115	10 to 150* 20 to 150* for transparent	220	110 Minimum
LD-200-U	Same features as LD-100-U but with wider label capacity.	Up to 165	10 to 150* 20 to 150* for transparent	220	110 Minimum
LD-100-U-SS	Same features as LD-100-U but in stainless steel.	Up to 115	10 to 150* 20 to 150* for transparent	220	110 Minimum
LD-200-U-SS	Same features as LD-200-U but in stainless steel.	Up to 165	10 to 150* 20 to 150* for transparent	220	110 Minimum

* Depending on the labels.


LABEL DISPENSERS OPTIONS

MODEL	DESCRIPTION	ROLL DIAM. (mm)	SPEED (mm/sec)
C-1	Counter option for Label Dispenser (factory installed).	-	
LD-FLANGES-220	Inner and outer Flange option for Label Dispenser (per pair). Fits all models. Recommended for narrow labels.	220	
LD-FLANGES-300	Inner and outer Flange option for Label Dispenser (per pair). Fits all models. To be used with LD-DE. Recommended for narrow labels.	300	
PS-18V	High-speed power supply to increase speed of the dispenser.	-	140 min.
LD-DE	Diameter extension: Allows using rolls with outer diameters up to 300mm (factory installed).	300	
EXT. COMMAND	The LD dispenses one label when receives a signal (contact closure). Factory installed.	-	

Size: H x W x D Approximately 229-x 305-x 229-mm (9-x 12-x 9-inches).

Shipping Weight: Approximately 6.4- to 6.8-kg (14- to 15-lbs).

Power: 230-vac 50-Hz 40-wa. 120-vac 60-Hz power supply is also available.

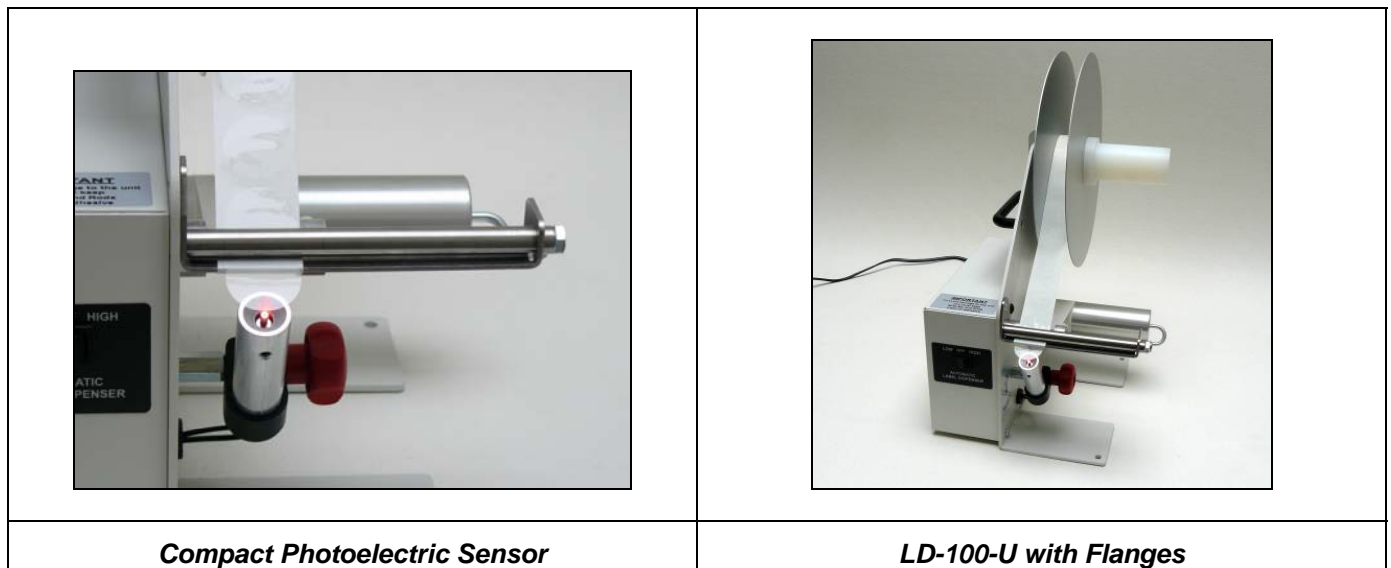

Specifications are subject to change without notice. DataLDU EUR 06/2010



AUTO I.D. SYSTEMS LTD
 30 Paradise Lane, Formby, Merseyside, L37 7EJ

Email: Info@Auto-ID-Systems.co.uk

www.Auto-ID-Systems.co.uk

CALL : 01704 876241
FAX : 01704 832321

